




MODEL KC80

# KC80

## HIGH EFFICIENCY MULTICRYSTAL PHOTOVOLTAIC MODULE

TYPICAL OUTPUT 80 Wp

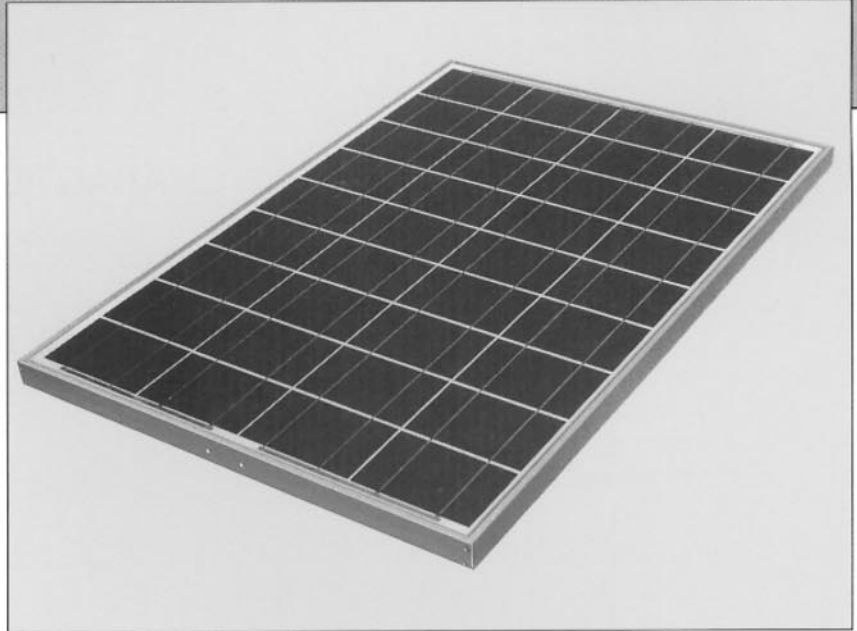

### HIGHLIGHTS OF KYOCERA PHOTOVOLTAIC MODULES

Kyocera's advanced cell processing technology and automated production facilities have produced a highly efficient multicrystal photovoltaic modules.

The conversion efficiency of the Kyocera solar cell is over 14%.

These cells are encapsulated between a tempered glass cover and an EVA pottant with PVF back sheet to provide maximum protection from the severest environmental conditions.

The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation.

### APPLICATIONS

- Microwave/Radio repeater stations
- Electrification of villages in remote areas
- Medical facilities in rural areas
- Power source for summer vacation homes
- Emergency communication systems
- Water quality and environmental data monitoring systems
- Navigation lighthouses, and ocean buoys
- Pumping systems for irrigation, rural water supplies and livestock watering
- Aviation obstruction lights
- Cathodic protection systems
- Desalination systems
- Recreational vehicles
- Railroad signals
- Sailboat charging systems

### SPECIFICATIONS

#### ■ Electrical Specifications


MODEL	KC80
Maximum Power	80 Watts
Maximum Power Voltage	16.9 Volts
Maximum Power Current	4.73 Amps
Open Circuit Voltage	21.5 Volts
Short-Circuit Current	4.97 Amps
Length	976mm (38.4in.)
Width	652mm (25.7in.)
Depth	52mm (2.0in.)
Weight	9.6kg (21.2lbs.)

Note: The electrical specifications are under test conditions of Irradiance of 1kW/m<sup>2</sup>, Spectrum of 1.5 air mass and cell temperature of 25°C

Kyocera reserves the right to modify these specifications without notice.


#### ■ Physical Specifications

(Unit: mm)

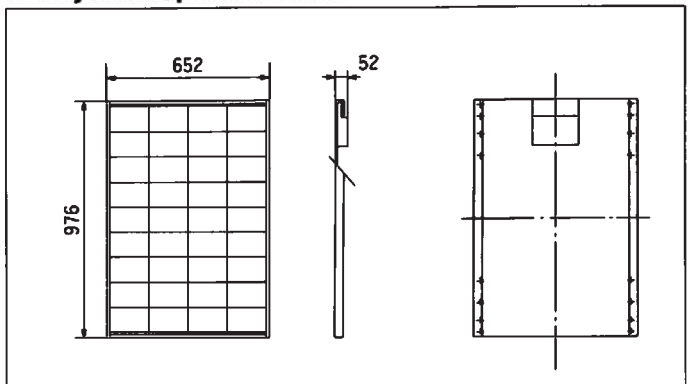


## ELECTRICAL CHARACTERISTICS

Current-Voltage characteristics of Photovoltaic Module KC80 at various cell temperatures

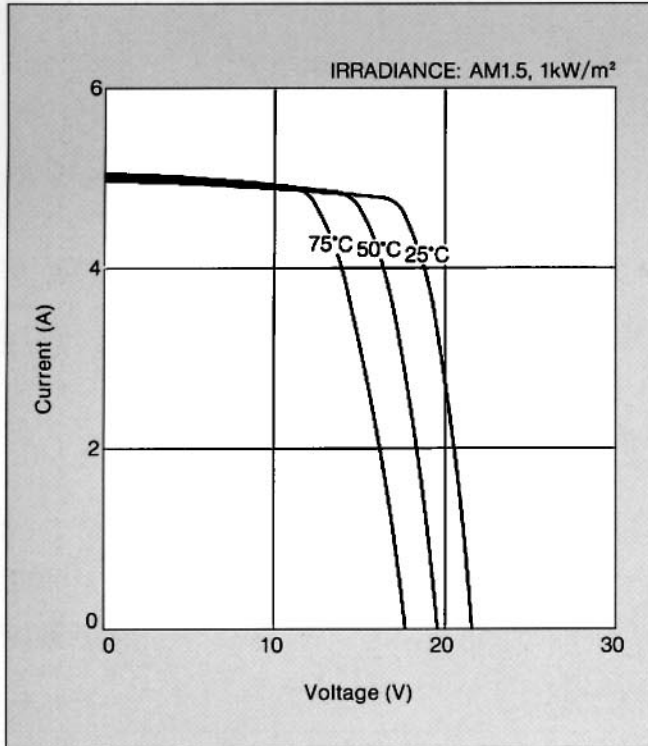

Current-Voltage characteristics of Photovoltaic Module KC80 at various irradiance levels

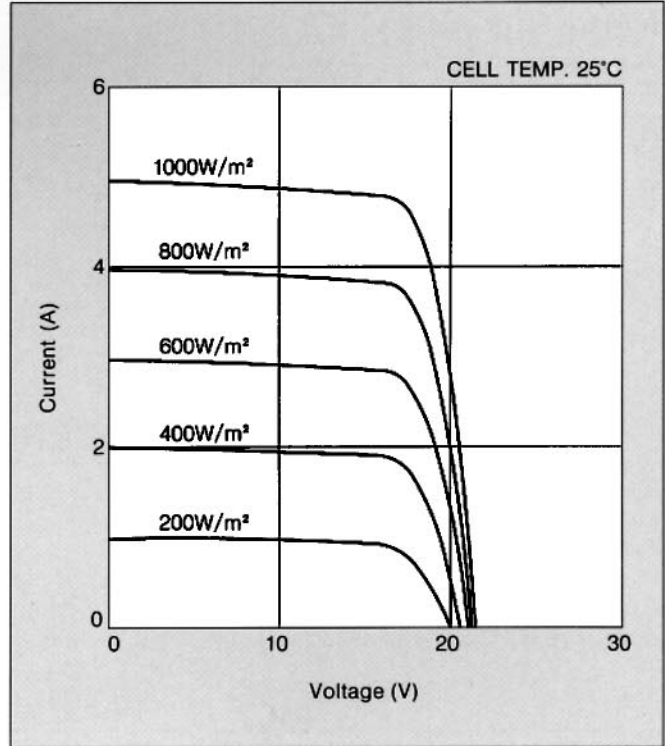

## QUALITY ASSURANCE

Kyocera multicrystal photovoltaic modules exceed government specifications for the following tests.

- Thermal cycling test
- Thermal shock test
- Thermal/Freezing and high humidity cycling test
- Electrical isolation test
- Hail impact test
- Mechanical, wind and twist loading test
- Salt mist test
- Light and water-exposure test
- Field exposure test

Please contact our office to obtain details without hesitation.



### KYOCERA CORPORATION

#### ■ KYOTO KARASUMA OFFICE

SOLAR ENERGY DIVISION  
8-1, Nagituji-Chuzaike-cho,  
Yamashina-ku, Kyoto 607, Japan  
Phone: (075)502-9088  
Telefax: (075)502-9090

#### ● KYOCERA AMERICA INC.

8611 Balboa Avenue, San Diego, California 92123, U.S.A.  
Phone: (619)576-2647 Telex: ITT 4723069  
Telefax: (619)569-9412

#### ● KYOCERA FINECERAMICS GmbH

Fritz Müller Straße 107, D-73730 Esslingen, F.R.G.  
Phone: (0711)9393417 Telefax: (0711)9393450

#### ● KYOCERA (HONG KONG) LTD.

Room 803, Tower 1 South sea Centre, 75 Mody Road,  
Tsimshatsui East, Kowloon Hong Kong  
Phone: (02) 7237183 Telefax: (02) 7244501

#### ● KYOCERA (HONG KONG) LTD. TAIPEI BRANCH

Suite 532, Asia Enterprise Center  
602, Min Chuan E. Road Taipei, Taiwan  
Phone: 7183595 7183596 Telex: 13724 KYOCETWN  
Telefax: 7183587

#### ● KYOCERA (HONG KONG) LTD. SINGAPORE BRANCH

100 Beach Road, # 22.01/03  
Shaw Towers, Singapore 0718  
Phone: 2917900 Telex: 20133 Telefax: 2918468