

76 MM ARROWPOINT ANCHOR



Made of high quality 12 gauge steel, American Earth Anchor's 3-inch ArrowPoint style anchor with integral swiveling cable combines superior pullout resistance, ease of installation and dependability at a very affordable price.



Compared to straight-shank stakes or cumbersome augers, the distinctive design of the 76 mm American Earth Anchor provides up to **907 Kilograms** of holding power, more than enough to secure anything from a mailbox up to a tool shed.

APPLICATIONS

AMERICAN EARTH ANCHORS ARE IDEAL FOR SECURING:

Sheds - Tarps - Trees - Mailboxes - Antennas
Fencing - Playground and Yard Equipment - Wind Turbines-
Portable Shelters and Canopies - Carports - Sports Goals - Inflatable Play Structures -
AND MUCH MORE!

GREAT FOR THEFT DETERRENCE!




American Earth Anchors is a producer of high quality innovative anchoring products and accessories for the military, commercial, government and residential markets.

Our engineers are ready to help with your anchoring questions and projects.




Exclusive Distributor for Australia and New Zealand

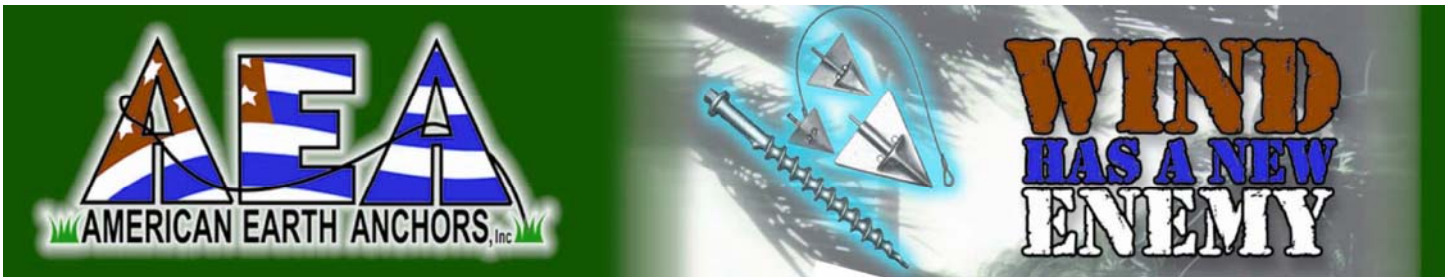

INSTALLATION INSTRUCTIONS


Step 1

Using drive rod and a hammer, drive anchor vertically into ground

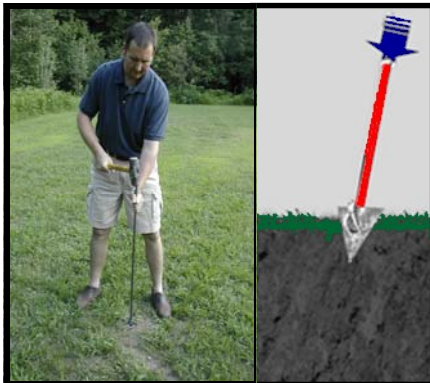

Step 2

Once driven to proper depth, retrieve drive rod

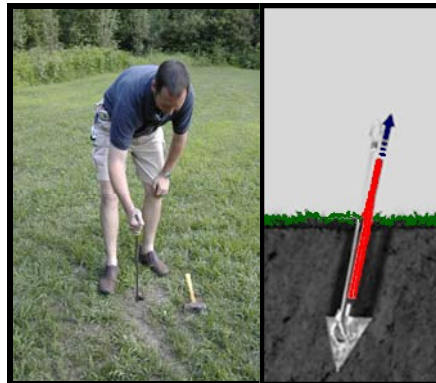

Step 3

Using drive rod for leverage, pull up on cable end to set anchor horizontally in ground



TECHNICAL DATA

Ultimate Pullout Resistance At Minimum Depth In Kilograms

Anchor Size - mm	Minimum Vertical Depth ¹ - mm	Cable Diameter	Hard Pan Soil	Class 1 Soil ²	Class 2 Soil ²	Class 3 Soil ²	Class 4 Soil ²
				Dense Sand & Gravel	Medium Sandy Gravel	Loose Medium To Fine Sand	Loose Fine Uncompacted Sand
76	609	3	907	816	771	272	160

1) In determining vertical depth to the ground anchor, the thickness of topsoil, peat, soft clay and similar soft soils at ground surface should not be included.

2) The applicable class of soil is that present within a zone from the ground anchor to a point from one to three feet above the anchor depending upon the anchor size.

3" ArrowPoint Ordering Instructions

3 - **36** - **TH** - **B50**
 Anchor Size Cable Length: Loop End: Volume Packaging:
 36" (standard) TH = Thimble B50 = Bucket qty 50
 CC = Cable Clamps TB = Tube qty 8

Examples:

- ◆ **3-36TH** is one 76 mm anchor with 3 mm diameter cable, 914 mm long with thimble end (standard anchor assembly)
- ◆ **3-36TH-B50** is a 76 mm anchor with 3 mm diameter cable, 914 mm long with thimble end, bucket of (50) pieces
- ◆ **3-60CC** is one 76 mm anchor with 3 mm diameter cable, 1524 mm long with cable clamps



Purchasing Options

- ◆ Single anchor assemblies with 3 mm diameter x 914 mm galvanized cable and thimble end. Other lengths available.
- ◆ Tube of (8) anchors with 3 mm diameter x 914 mm long galvanized cable, thimble loop end and drive rod.
- ◆ Bucket of (50) anchors with 3 mm diameter x 914 mm long galvanized cable, thimble loop end.
- ◆ Except for tube orders, drive rods are sold separately. Drive rod part number is DR-36.
- ◆ Thimble ends can be substituted with cable clamps for alternate loop sizing preferences (Call).



For Information & Pricing Please Contact

Unit 3, 301 Hillsborough Road

Warners Bay NSW 2282, Australia

Phone: 02 4954 3310 Fax: 02 4954 3360

Email: info@solaronline.com.au Web: www.solaronline.com.au

